


ELECTRICAL CONNECTION:

All electrical connections should be made in accordance with the National electrical code and any local code as applicable. It should be installed by a qualified electrician.

- Verify the supply voltage is correct (240V +10% 50Hz AC).
- The power cable should be 3-core 1-1.5mm².
- Use a connector of appropriate rating to connect the luminaire terminals to the supply terminals as shown in the figure below. The connections should not be loose.
- After electrical connection, insert the connector and the lead wire inside the pipe bracket and put the fixture on the pipe bracket.

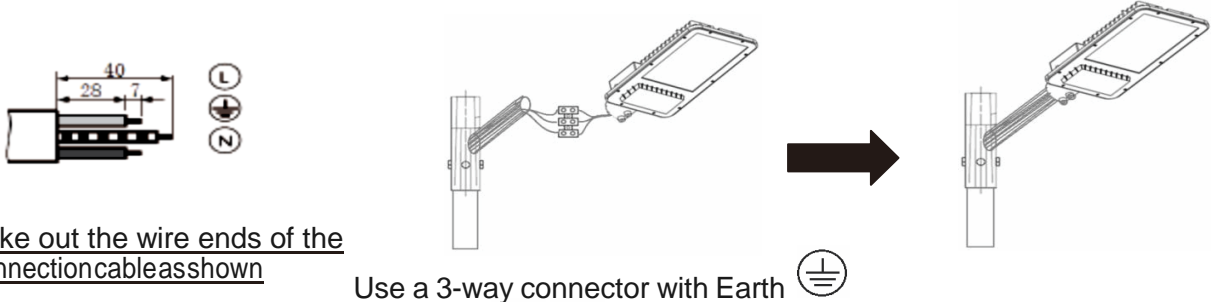

Take out the wire ends of the connection cable as shown

Use a 3-way connector with Earth 


Surge Protection Device (SPD) Connection:-

- Use of SPD is optional,
- Where SPD is connected, it should be between the power connection and the luminaire connection.

MOUNTING:

Before mounting ensure to make all electrical connections as per the instructions given above.

- Install the luminaire by mounting on pole.
- Ensure that the mounting pipe is fully inserted.
- Ensure the luminaire is not tilted or rotated on the pole mount.
- Fasten the Bolts along with the Nuts and tighten them fully. Do not over-tighten.
- Ensure the luminaire is not loose on the pole after fixing the bolts.



The Bolt torque level should not be greater than 16.3 Nm

STORAGE:

When required to be stored, the luminaires,

- Should not be stored outside their corrugated boxes.
- Should be placed in a covered dry storage area of ambient temperature -10°C to +45°C.
- Should not be over stacked.

These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation, operation or maintenance. The product picture/Diagram may not be the same as the product supplied. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's purpose, the matter should be referred to Signify Innovations India Limited.

Manufactured and Marketed by:

SIGNIFY INNOVATIONS INDIA LIMITED

(formerly known as Philips Lighting India Limited)

C/O Mangalam Business Center,
22 Camac Street, Block B, 6th Floor,
Kolkata-7000016 West Bengal India

• Picture of the luminaire may vary from the actual supplied.